





CAD MODEL

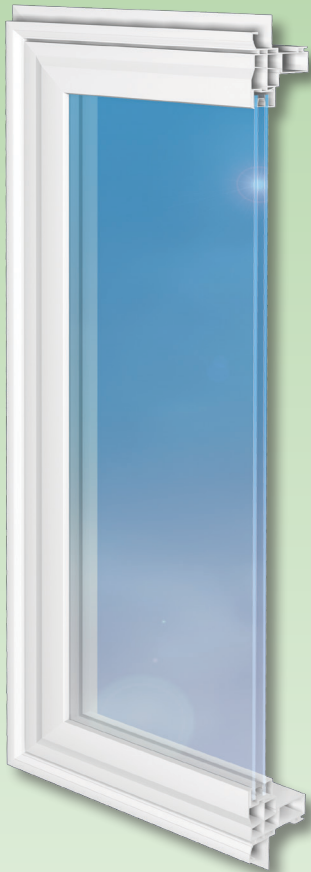

PROFILES

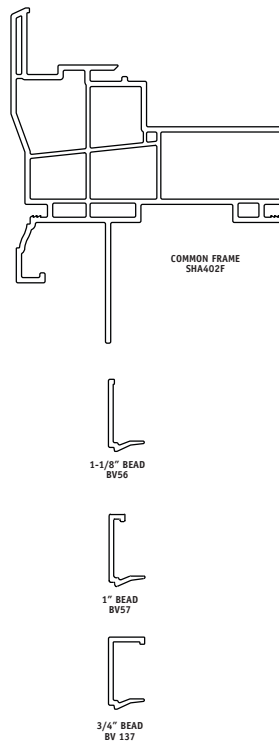


FEATURES and BENEFITS

- All welded frame
- 3-1/4" frame width ideal for replacement installations
- Integral Nail Fin and J Channel
- J channel designed with Brick Mold accents
- Aesthetically pleasing exterior frame design
- Full complement of accessory profiles
- Multiple Glazing bead options using single or dual durometer
- Maximum glass thickness of 1-1/8"
- Multi chambered vinyl profiles for thermal efficiency
- DP50 performance levels
- Full Family of products (Hung, Slider, Casement and Picture window(s))
- Pinnacle lamination available



ASSEMBLY DRAWING

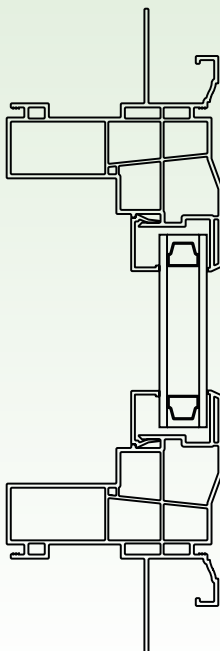

MANUFACTURING LIMITATIONS

BASELINE PERFORMANCE

Thermal Insulation

GLASS	Uc Value	R Value
LoE/Argon	0.26	3.84
Double LoE/Argon	0.21	4.76
Double LoE/Krypton	0.18	5.55

Structural Performance

Air Infiltration @ 25 mph	0.01 cfm/ft ²
Water Penetration	7.50 psf
Uniform Loads	+/-75.00 psf

AAMA RATING: CW-PG50 72x72 FW

