



Custom Vinyl Products, LLC

www.customvinyl.net

Locally Owned & Operated
Products Certified 100% Lead Free


SHA4 Single Hung

New Construction



FEATURES and BENEFITS

- All-welded frame and sash
- Sloped sill designed for efficient water evacuation
- 3¼" frame width ideal for replacement installations
- Constant Force balance system
- Integral nail fin and J-channel
- J-channel designed with brick mold accents
- Aesthetically pleasing exterior frame design
- Full complement of accessory profiles
- Multiple glazing bead options using single or dual durometer
- Optimum designed aluminum sash reinforcement
- Maximum glass thickness of 1 1/8"
- Multi-chambered vinyl profiles for thermal efficiency
- Triple-weatherstripping
- Interlocks designed for ease of operation and positive engagement
- Factory applied brick mold and 5/4x4 available
- Triple pane glass available
- DP50 performance levels
- Full Family of products (Hung, Slider, Casement and Picture window(s))
- STC rated 36
- Lead free
- Energy Star rated and labeled

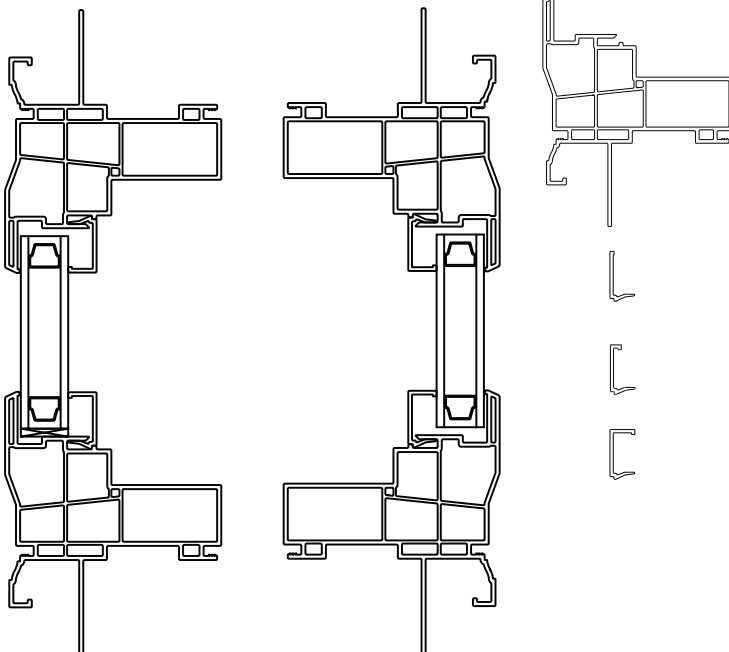

PERFORMANCE

THERMAL INSULATION

GLASS	Uc Value	R Value	SHGC
LowE 270	0.29	3.45	.28
LowE 366	0.28	3.57	.21
LowE 366 w/ei80	0.20	5.00	.19

STRUCTURAL DATA

Air Infiltration @ 25mph	0.15 cfm/ft ²
Water Penetration	7.50 psf
Uniform Loads	+/- 75.00 psf

AAMA RATING: PG50-H

