




Euroview Swing Door

What better way to make a positive statement as well as securing your home or building against weather and intruders than with one of our wide range of residential or commercial doors? Whether you wish to add visual impact or simply to compliment the style of a building, there is a door style for everyone. The options of style and mechanics are almost infinite. Think about our range of lustrous wood grains. Or for exceptional flair, think what can be done with the choices of ornamental, beveled or colored glass. Different functional glass types, perhaps combined with one of a comprehensive range of locks and mechanisms, can also be used to further add to the security of your home or office.

All VEKA Swing Doors come standard with high quality hardware. The smooth operating handles and hinges can be color matched to the vinyl or they are available in a brushed nickel satin finish and polished brass. Panic hardware is available for commercial entry doors.

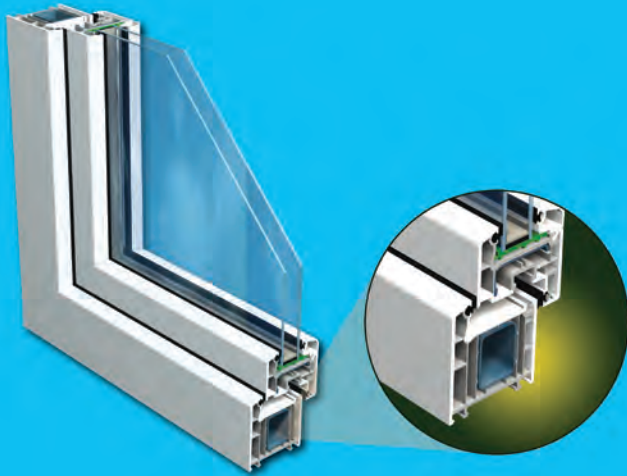

- All main profiles are reinforced with galvanized steel
- Thresholds can be standard outer frames or low profile aluminum thresholds to suit different installations, weather and security requirements
- Alternative beads available in sloped or sculptured designs
- Glazing beads available to accommodate IG-Sizes from 3/4" to 1-1/2".
- Residential / commercial applications
- Available in single and double sidelite and toplite combinations
- 70mm front to back multi-chambered profiles
- Available in white, almond, clay, wood grain and colored finishes (laminated)
- Available inswing or outswing



Euroview Swing Door



Performance Matrix

Product	Frame	Glazing	Performance		
Door Type	Frame Height	Sash Height	DP Rating	Unit Size	Size Limitations
In-Swing	80mm	105mm	DP-50	72" x 99"	72" x 96"
Out-Swing	80mm	105mm	DP-40	71" x 98"	72" x 96"
Out-Swing	100mm	105mm	DP-50	79" x 83"	72" x 96"

AAMA Designation			
RATING	AIR	WATER	STRUCTURAL
LC - PG55 - SHD	15 CFM / Ft2	8.36 psf	± 82.76 psf

Thermal performance		
GLASS TYPE	U-Value	R-Value
1" Clear Air	0.41	2.44
1" Clear LowE / Argon	0.27	3.70
1" Quad Glazed Double LowE / Krypton	0.20	5.00

